

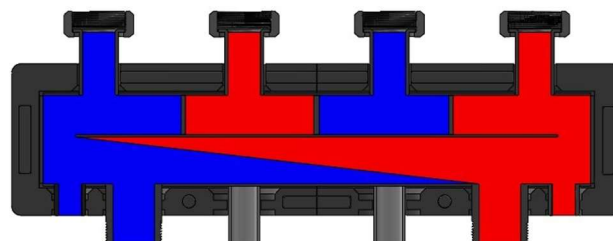


Parameter	Unit	2-circuit distributor and hydraulic separator
Flow rate	M3/h	3.0
Heating power	Kw ( $\Delta T=20^{\circ}\text{C}$ )	60
Distributor length	mm	475
Connection: installation side	-	6/4" Female
Connection: boiler side	-	6/4" Male
Additional connection	-	2x 1/2" Female
Spacing: installation side	mm	125
Spacing: boiler side	mm	315
Spacing of distributor mounting brackets	mm	125
Maximum pressure	bar	6
Maximum operating temperatures	$^{\circ}\text{C}$	110
Distributor insulation	-	20mm-thick EPP

The distributor integrated with the separator is designed for central heating installations of 60 kW. It is used to facilitate the installation of mixing and pumping groups. It enables reducing the number of fittings and pipes necessary to make circuits of installation devices. In addition, the device has an integrated hydraulic separator which performs the following functions: separation of the primary circuit from the heating circuit, eliminating the need to balance the boiler and heating circuits, and maintaining independent streams in the boiler circuit and heating circuits. Brackets, screws, wall plugs and washers for wall mounting are included.

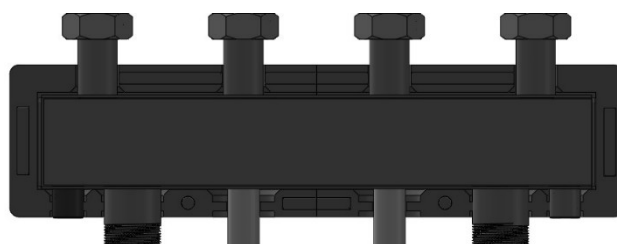

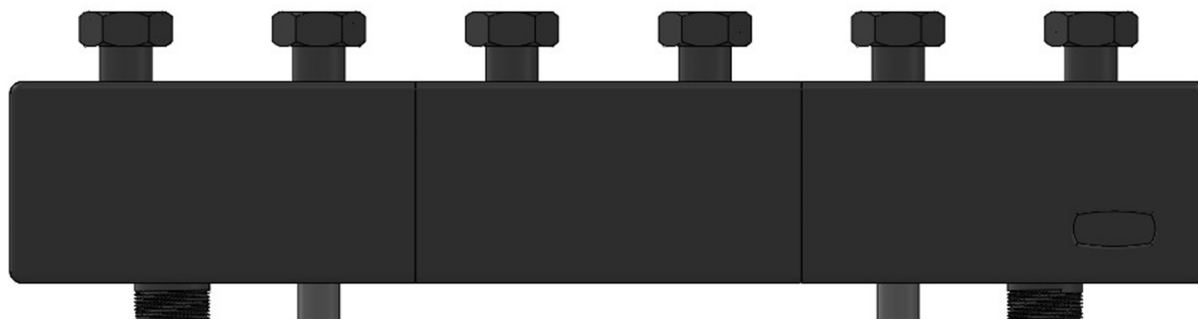

Parameter	Unit	3-circuit distributor and hydraulic separator
Flow rate	M3/h	3.0
Heating power	Kw ( $\Delta T=20^{\circ}\text{C}$ )	60
Distributor length	mm	725
Connection: installation side	-	6/4" Female
Connection: boiler side	-	6/4" Male
Additional connection	-	2x 1/2" Female
Spacing: installation side	mm	125
Spacing: boiler side	mm	565
Spacing of distributor mounting brackets	mm	375
Maximum pressure	bar	6
Maximum operating temperatures	$^{\circ}\text{C}$	110
Distributor insulation	-	20mm-thick EPP

The distributor integrated with the separator is designed for central heating installations of 60 kW. It is used to facilitate the installation of mixing and pumping groups. It enables reducing the number of fittings and pipes necessary to make circuits of installation devices. In addition, the device has an integrated hydraulic separator which performs the following functions: separation of the primary circuit from the heating circuit, eliminating the need to balance the boiler and heating circuits, and maintaining independent streams in the boiler circuit and heating circuits. Brackets, screws, wall plugs and washers for wall mounting are included.

