

ES2V/2,0S Al i ES2V/2,0B Al – flat solar collector with meander absorber, made entirely of aluminum, designed for vertical mounting.

Solar collector ENSOL ES2V/2,0S Al and ES2V/2,0B Al is designed for changing energy of solar radiation into useful thermal energy used for providing warm service water, heating swimming pools or supporting a heat source in a heating system.

Collector's housing construction is based on a rigid frame bent from a special aluminum profile patented by ENSOL company. At the bottom the housing is closed with an aluminum sheet, whereas the cover is made of special, high-transmission solar glass. The manner of fixing the glass ensures tightness of housing and minimizes thermal tensions.


The main part of the collector is an absorber, the plate of which is made of aluminum sheet covered with a high selective eta plus coat in order to ensure a high level of solar radiation absorption, which results in obtaining high efficiency of the energy conversion process. The absorber's plate is connected by means of ultrasonic welding with the aluminum tubes system, in which the medium circulates.

Heat losses were minimized by application of lower and lateral insulation made of mineral wool of low heat conduction. Specially designed assembly sets made of stainless steel are used for trouble-free and secure mounting of collectors to roof constructions with different angles inclination.


Flat collectors ES2V/2,0S Al and ES2V/2,0B Al. have certificate of compatibility with norm **DIN EN 12975-2:2006** conducted by TÜV Rheinland Immissionsschutz und Energiesysteme GmbH and **Solar Keymark certificate**.

Flat collector:	Symbol	Unit	Value
Width	A	mm	1006
Height	B	mm	2007
Depth	C	mm	85
Weight	m	kg	39
Surface	S	m ²	2,019
Optical efficiency *	η_0	%	80,9
Coefficient *	a1	W/(m ² K)	3,442
Coefficient *	a2	W/(m ² K ²)	0,016
Coefficient of angle of incidence	IAM	-	0,87
Connnection: Al. tube	\emptyset	mm	22
Housing	Aluminum Profile		
Cover	Tempered solar glass, 4mm thick		
Absorber:			
Absorber's type	Hydraulic system Al.- Al. sheet		
Absorber sheet coating	High selective layer		
Execution technology	Ultrasonic welding		
Absorption coefficient	α	%	95
Emission Coefficient	ϵ	%	5
Width	a	mm	953
Height	b	mm	1955
Absorber's surface	S _b	m ²	1,863
Aperture surface	S _n	m ²	1,853
Liquid content	V	dm ³	1,8
Stagnation temperature	T _s	°C	185
Guaranteed minimal thermal output	kWh/m ² -year		525
Flow:			
recommended	l/h	60-90	
permissible	l/h	50-190	
Lower insulation:	Mineral wool 40 mm thick		
Lateral insulation:	Melamine foam 8 mm thick		
*Data relative to the aperture area:			
Solarkeymark	011-7S1617 F		


Collector efficiency curve ES2V/2,0 Al. related to the aperture surface (for $G=1000\text{W/m}^2$)

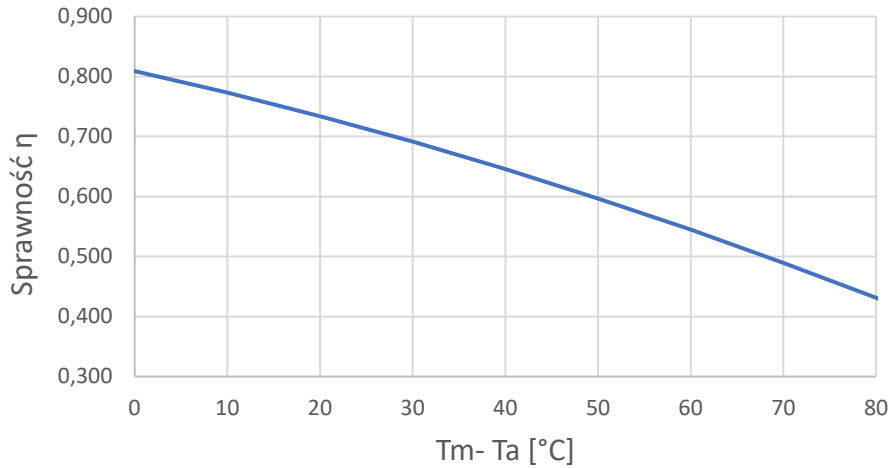

Collector capacity ES2V/2,0 Al. (for $G=1000\text{W/m}^2$)

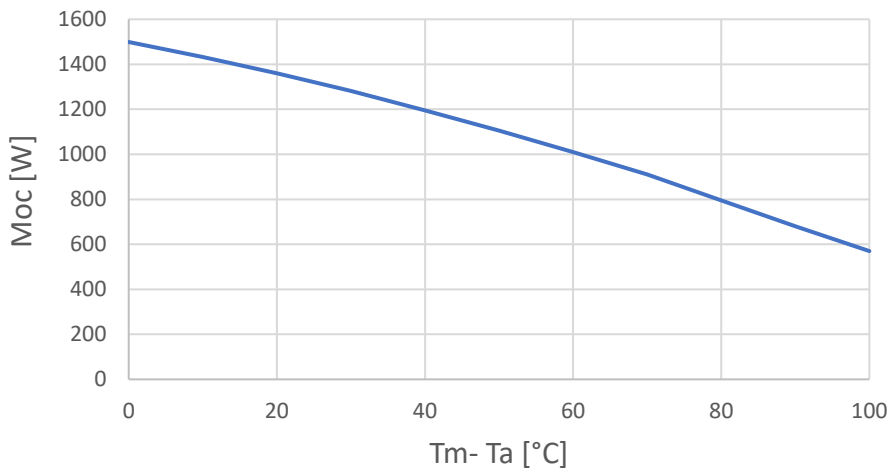

Spadek ciśnienia w kolektorze ES2V/2,0 Al

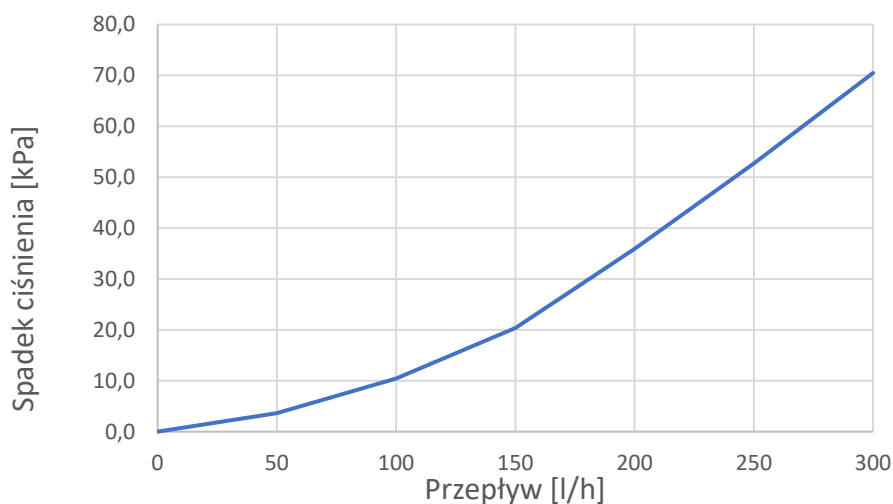

The key:

t_m – average liquid temperature;

t_a – environment temperature;

G – intensity of solar radiation